PHASE SHIFTER DATASHEET




2.4MM(MALE)-2.4MM(FEMALE) PHASE SHIFTER

2.4-JPK

Page

1/1

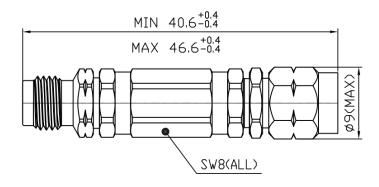

*Dimensions are in mm

Connector 1 Type	2.4mm Male
Connector 1 Impedance	50 Ohms
Connector 1 Polarity	Standard
Connector 2 Type	2.4mm Female
Connector 2 Impedance	50 Ohms
Connector 2 Polarity	Standard
Connector Mount Method	None
Adapter Body Style	Straight
Electrical Specification Frequency	DC to 50 GHz
Insertion Loss (dB)	≤ 1.5
VSWR /Return Loss	1.7
Maximum phase shift degre	7.2° /40GHz
Maximum phase shift degre Phase shift sensitivity	7.2° /40GHz 0.6° /GHz/圏
	•
Phase shift sensitivity	•
Phase shift sensitivity Materials Information	0.6°/GHz/圈
Phase shift sensitivity Materials Information Center Contact	0.6° /GHz/圏 CuBe Gold Plated
Phase shift sensitivity Materials Information Center Contact Body	0.6° /GHz/圏 CuBe Gold Plated Stainless Steel
Phase shift sensitivity Materials Information Center Contact Body Dielectric	0.6° /GHz/圏 CuBe Gold Plated Stainless Steel

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc.	Tel.: +86 10 86484190
4th Floor, New Material Plaza, Yongfeng Hi-Tech Base, Haidian	Fax: +86 10 86484190-0
District,Beijing ,China(100094) www.gwave-tech.com	email: gwave@gwave-tech.com