

Power Divider/Combiner

Gwave

50Ω 4 Way SMA Power Divider(0.5 ~ 6G)

GPD-4-005060-E


Electrical Specifications

Frequency Range, GHz	0.5 ~ 6
Impedance, Ohms	50
Insertion Loss Max.[dB]	1.8
Amp.Bal. Max.[dB]	±0.3
Input VSWR Max.	1.25
Output VSWR Max.	1.20
Isolation Min.[dB]	20
Phase Bal. Max.[Deg.]	±4
CW Power Max.[W]	30

Mechanical Specifications

Conn.Type	SMA(F)
Weight Max[g]	185
Operating Range deg.[C]	-35 ~ 75
Color	Sandblasting natural color

Outline Drawing

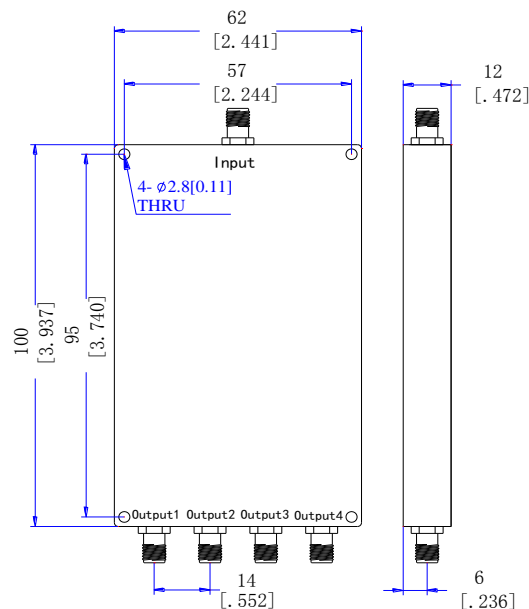

Notes

- Insert loss does not include theoretical power distribution insert loss[6dB].
- Compliant MIL-STD-810G environment test standard.