




Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN



Schematic Picture

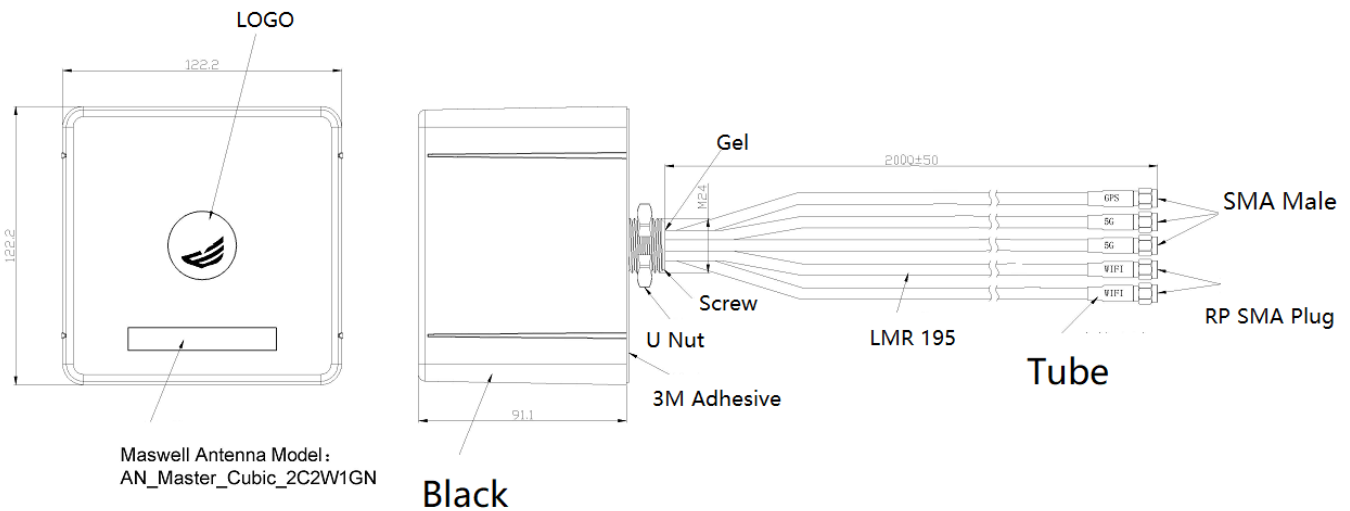

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN

Specifications

Item		Specifications	
GNSS Antenna (GPS/GLONASS/ Beidou/Gaileo)	Dielectric Antenna	Center Frequency	1561.098~1602MHz
		Polarization	RHCP
		Gain	5dBic@PCB (Zenith)
		V.S.W.R	< 1.5
		Impedance	50Ω
		Axial Ratio	3dB(max)
	LNA	Gain	28±2dB
		Noise Figure	≤1.5dB
		Filter Insertion Loss	< 3dB
		Supply Voltage	3~5V DC
		Current Consumption	< 20mA
Antenna 1: 5G/4G LTE/WiFi6E/UWB	V.S.W.R	< 2.0	
	Frequency Range	600MHz~8.0GHz	
	Polarization	Linear	
	Gain	Up to 6dBi (20cm Cable Length)	
	Radiation Pattern	Omni-directional	
	V.S.W.R	average 3.0	
Antenna 2: 5G/4G LTE/WiFi6E/UWB	Efficiency	>50%	
	Frequency Range	600MHz~8.0GHz	
	Polarization	Linear	
	Gain	Up to 6dBi (20cm Cable Length)	
	Radiation Pattern	Omni-directional	
	V.S.W.R	average 3.0	
	Efficiency	>50%	

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN

Specifications

Item	Specifications	
Antenna 3: WiFi	Frequency Range	2100MHz-7200MHz
	Polarization	Linear
	Gain	4dBi
	Radiation Pattern	Omni-directional
	V.S.W.R	< 1.5
	Impedance	50Ω
Antenna 4: WiFi	Frequency Range	2100MHz-7200MHz
	Polarization	Linear
	Gain	4dBi
	Radiation Pattern	Omni-directional
	V.S.W.R	< 1.5
	Impedance	50Ω
Mechanical	Dimension	122mm * 122mm * 91mm
	Cable	LMR 195 equivalent 2 meters
	Connector	SMA Male for 5G MIMO SMA male for GNSS RP SMA Plug for WIFI MIMO
Environmental	Operating Temperature	-40°C~+85°C
	Relative Humidity	Up to 95%
	UV Exposure & Water Immersion	F1 (UL746C)
	Radome Material	ASA/ (UL Yellow Card)
	Waterproof Grade	IP 67 (EURO: EN 60529:1991+A1:2000+A2:2013 +AC:2019 CHINA: GB/T4208-2017)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

Suzhou maswell communication technology co. Ltd

Add: Floor 3, Building 6, No. 88 Zhenbei Road, High-tech District, Suzhou 215153, Jiangsu, China


Http: www.maswelltech.com

E-mail: Sales@maswelltech.com

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


5G S11 Reflection Coefficient

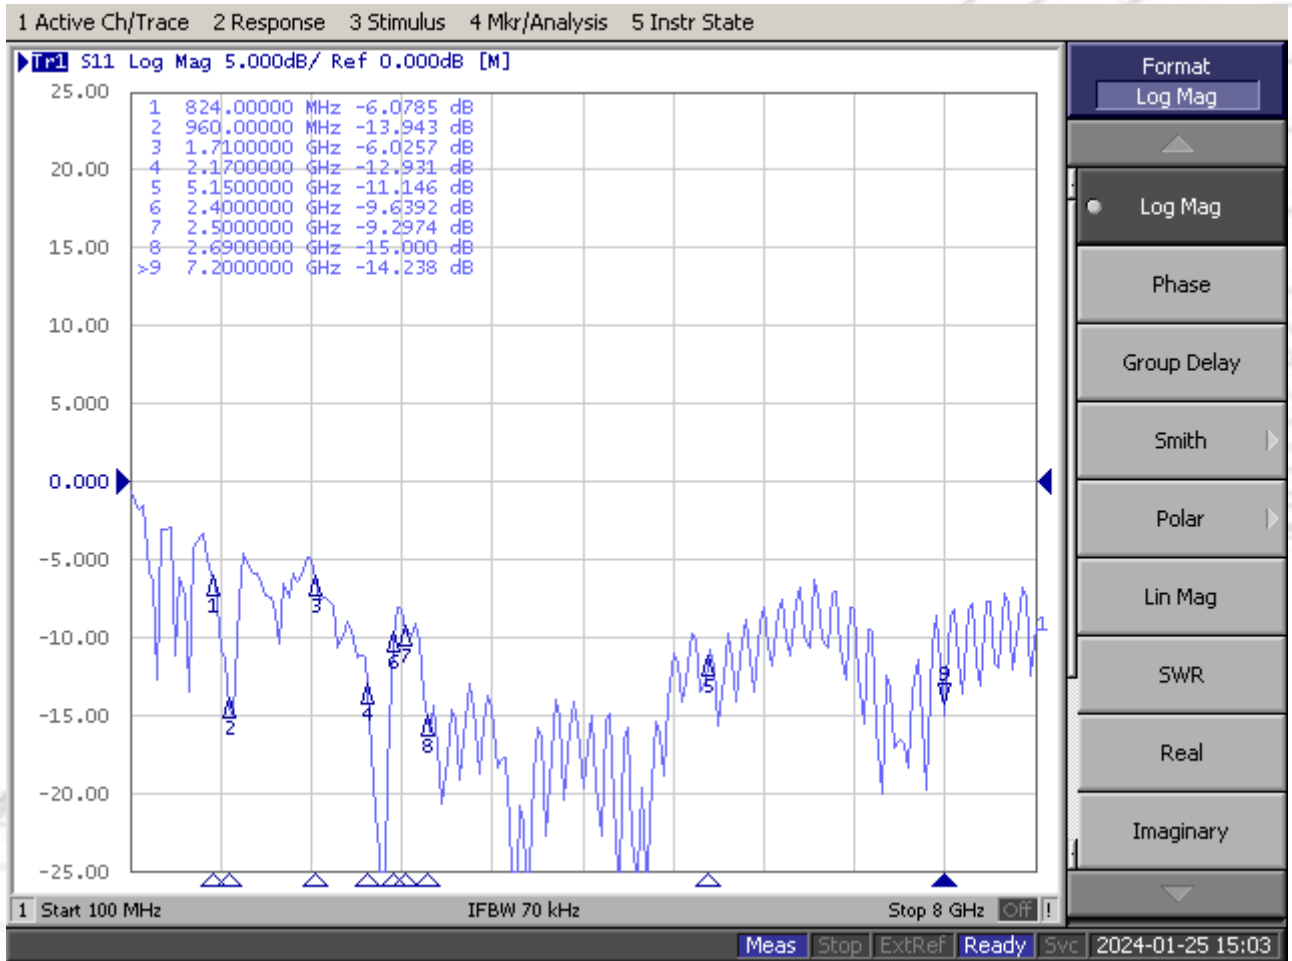

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


WiFi S11 Reflection Coefficient

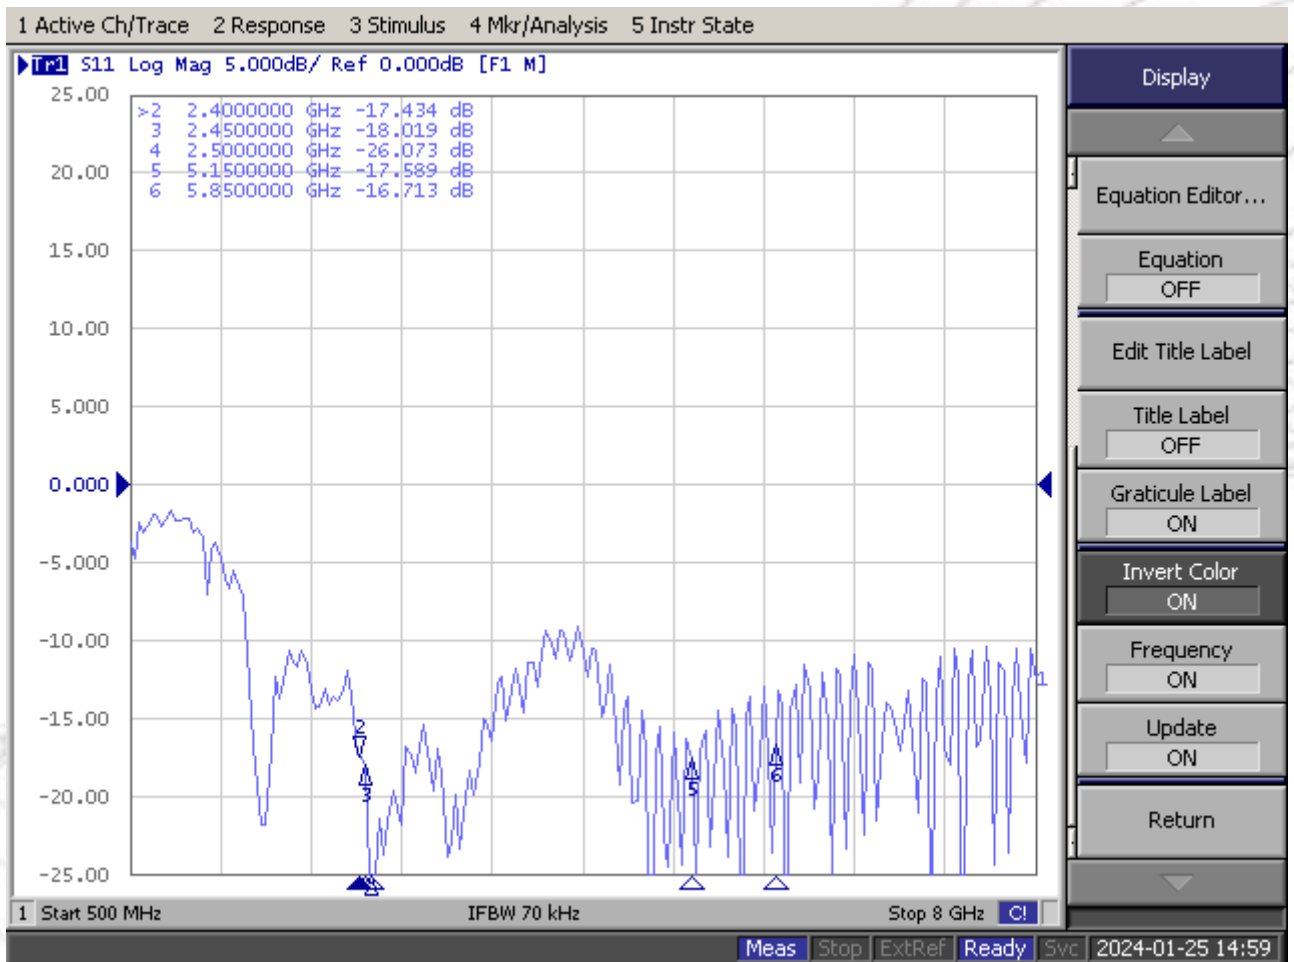

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


GNSS/GPS S11 Reflection Coefficient

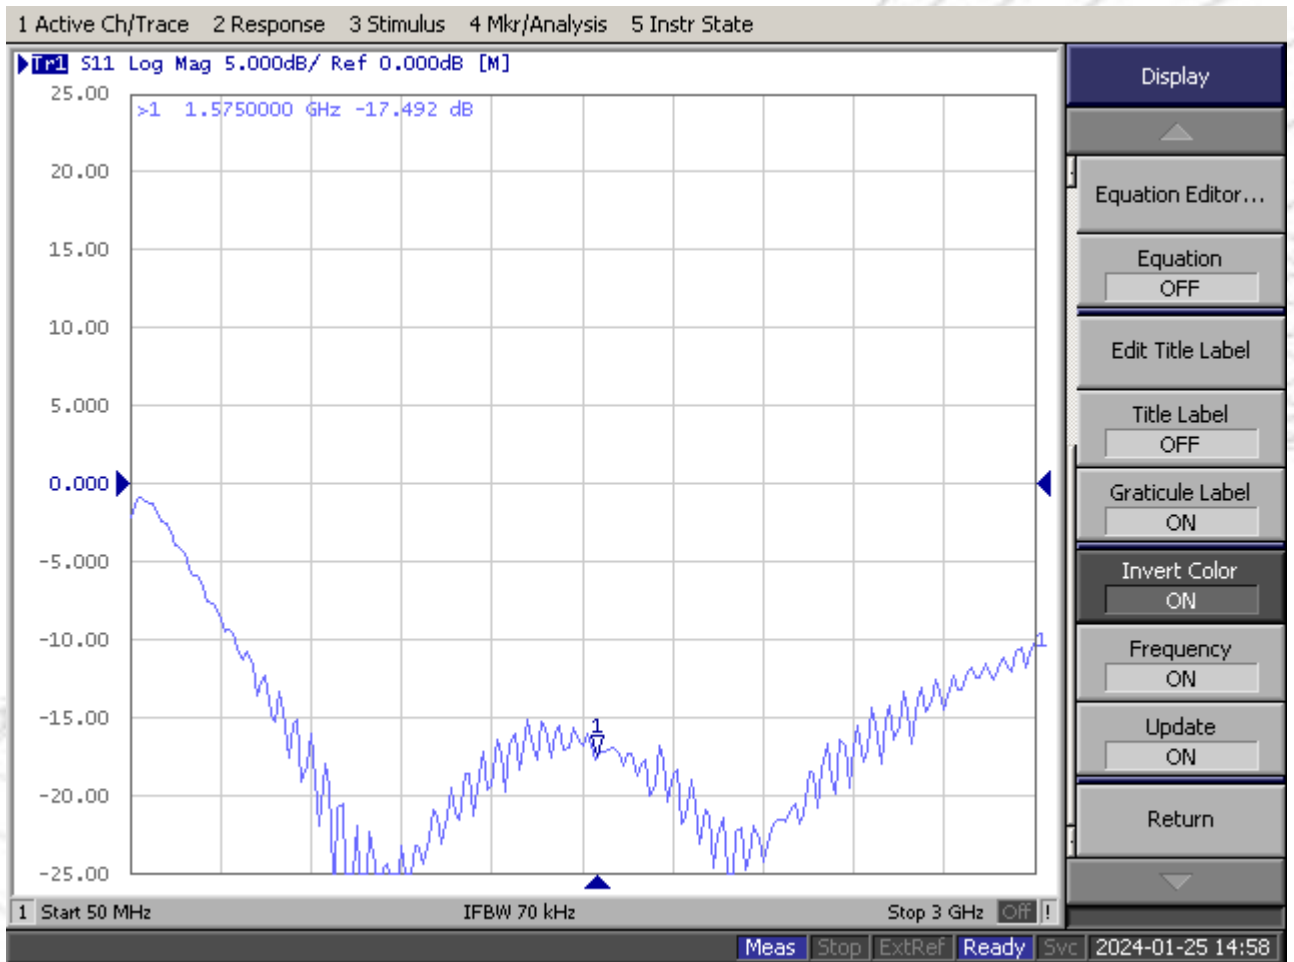

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN

Isolation Port 1/Cable 1 to Port 2/Cable 2

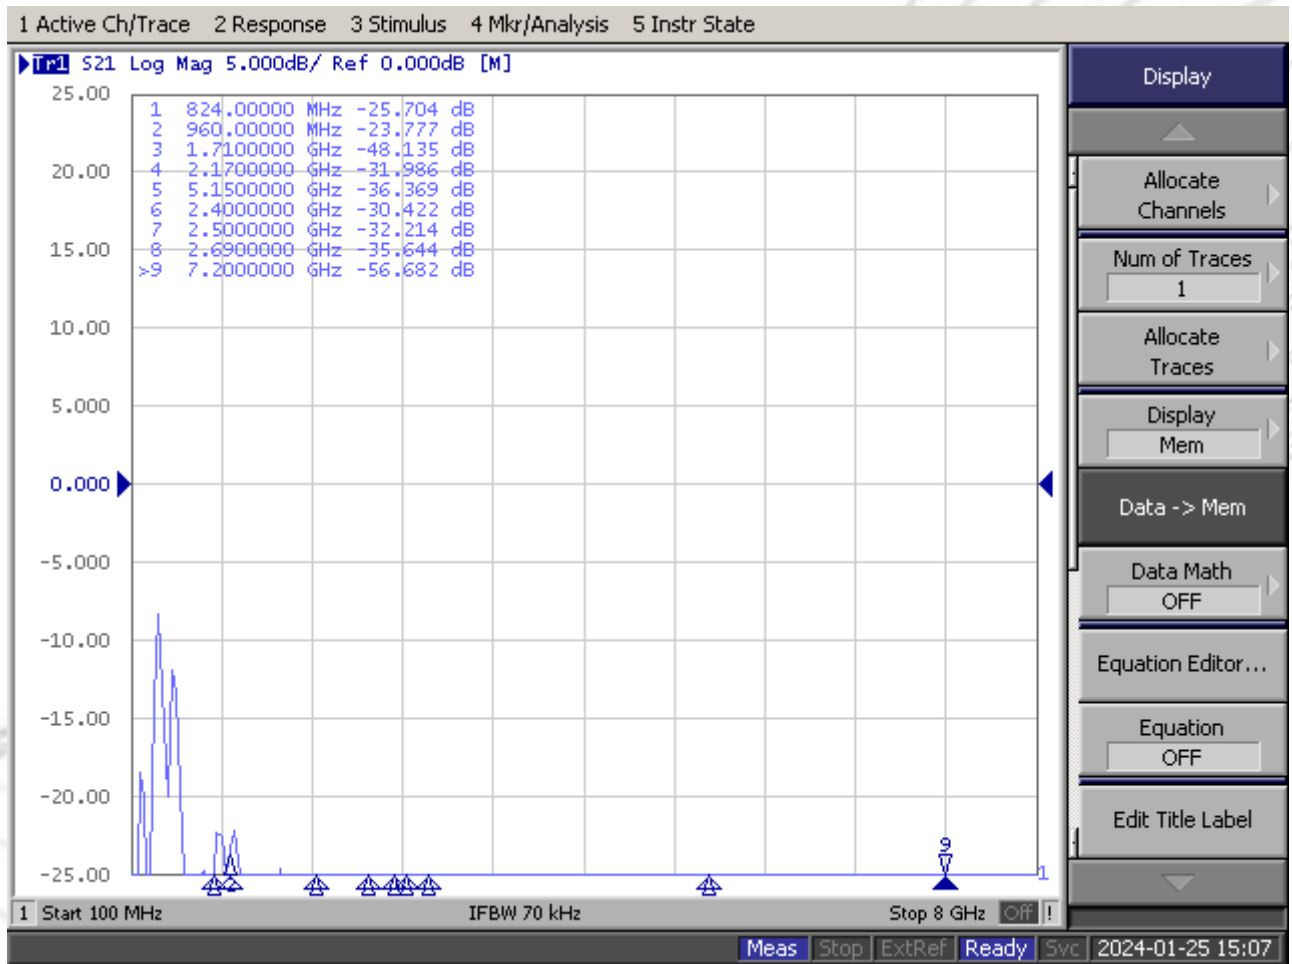


Cable 1 : 5G, Cable 2: 5G, Cable 3: WiFi
Cable 4: WiFi, Cable 5: GPS /GNSS

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


Isolation Port 1/Cable 1 to Port 3/ Cable 3

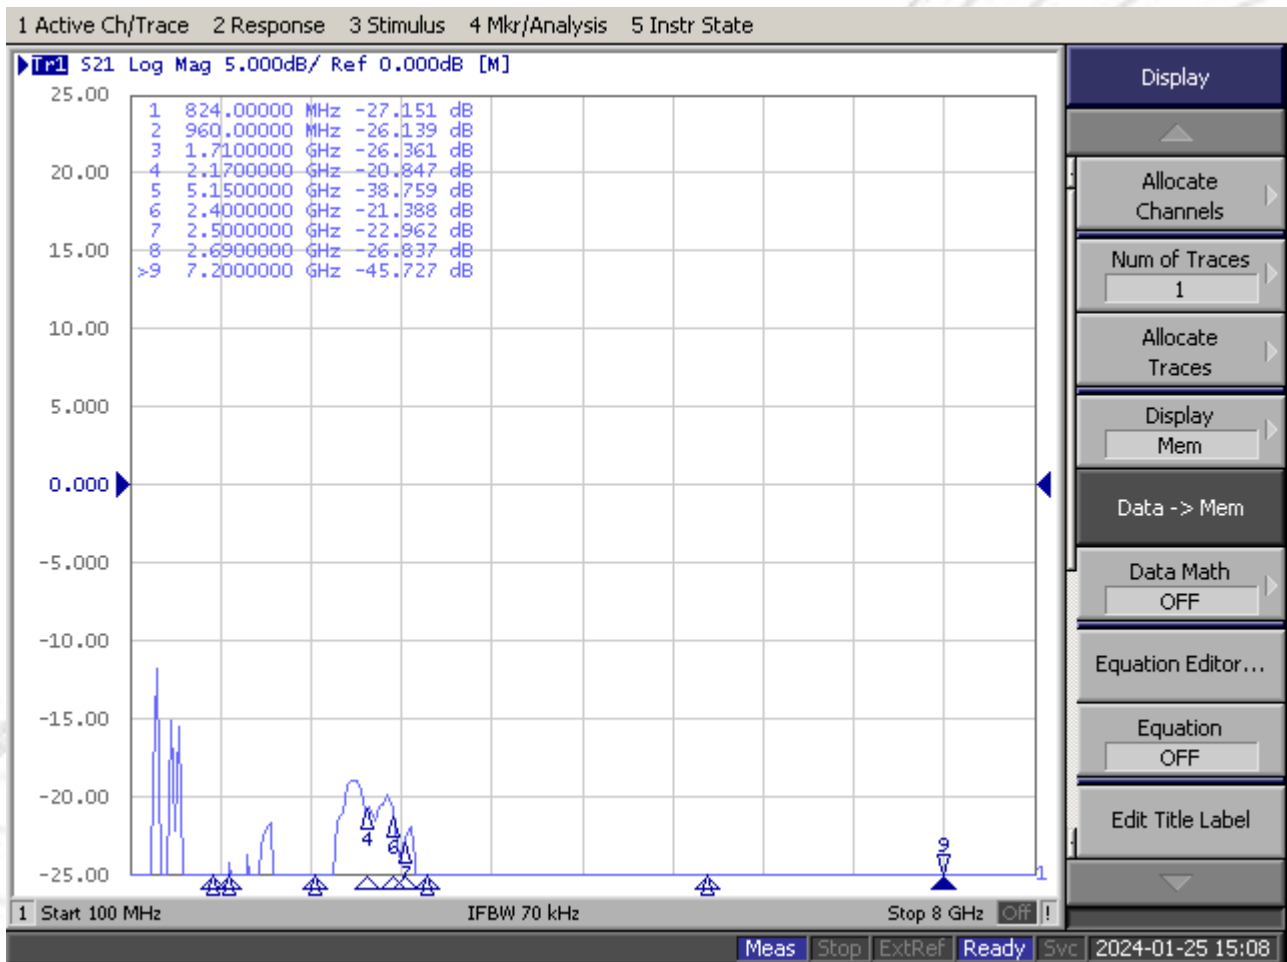

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


Isolation Port 1/ Cable 1 to Port 4/ Cable 4

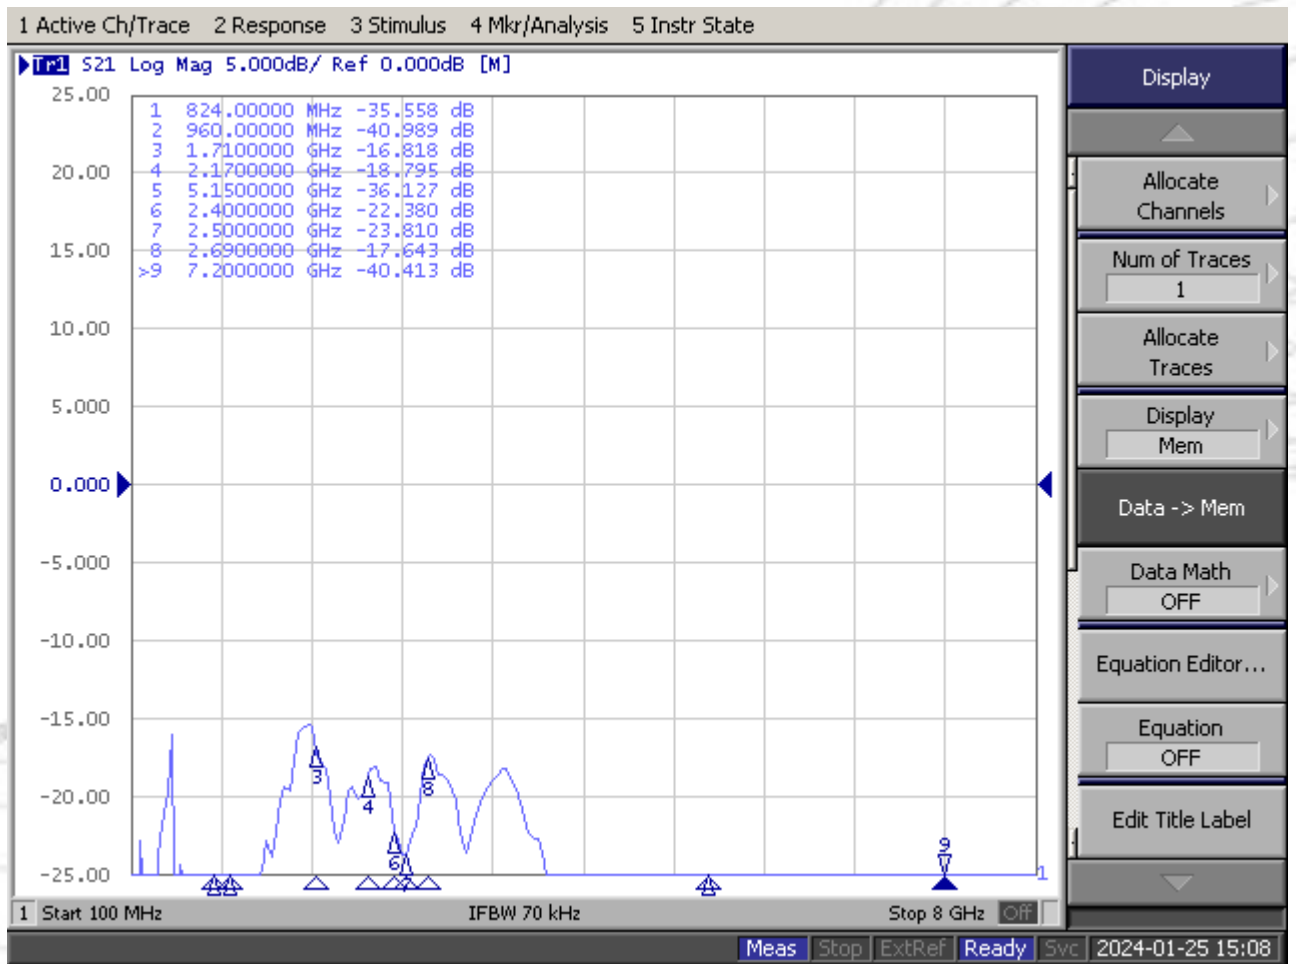

Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


Isolation Port 1/ Cable 1 to Port 5/ Cable 5

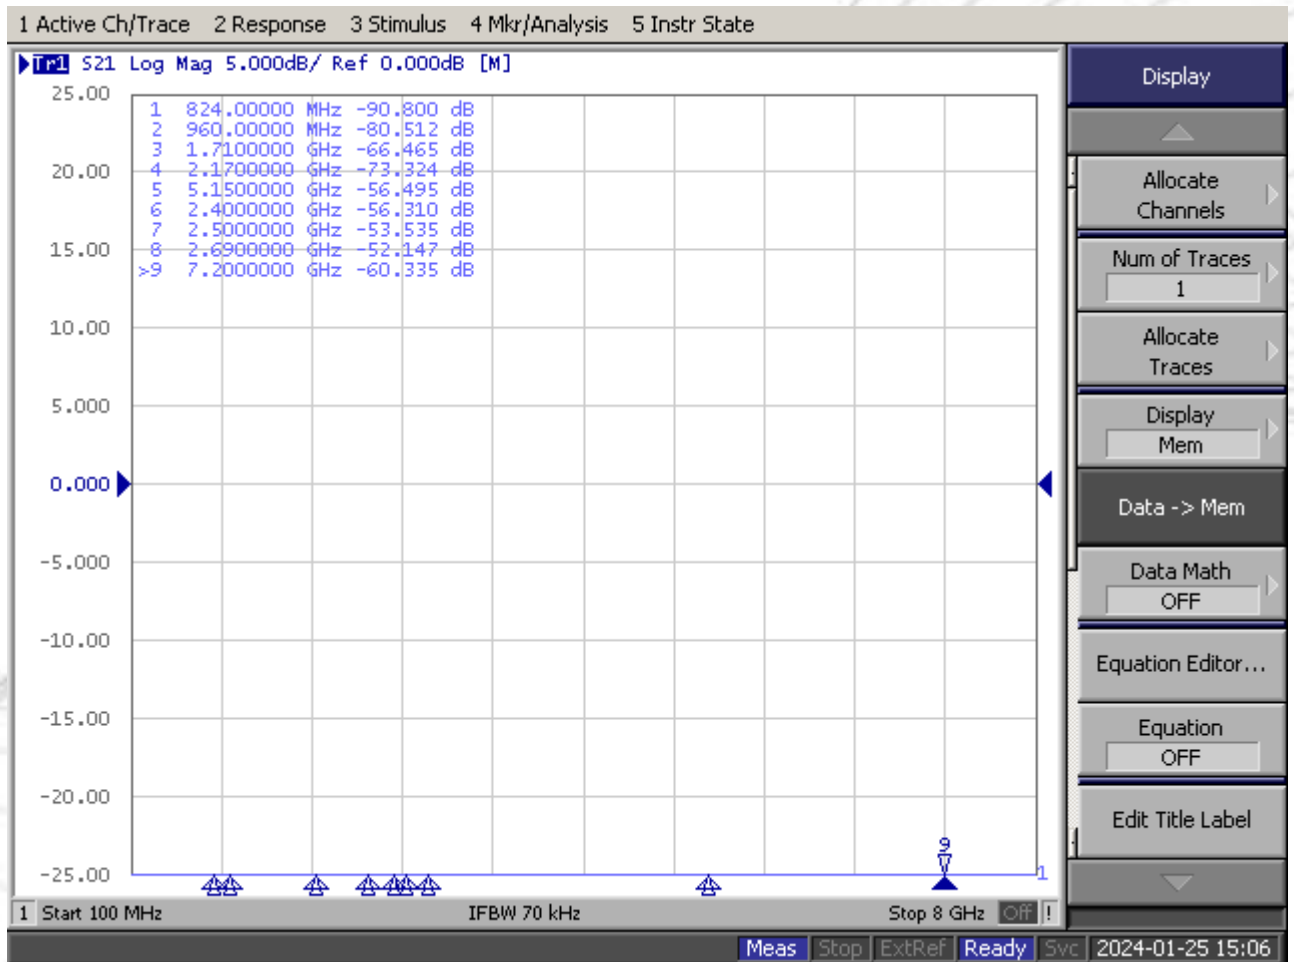


Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


Radiation Pattern (5G)

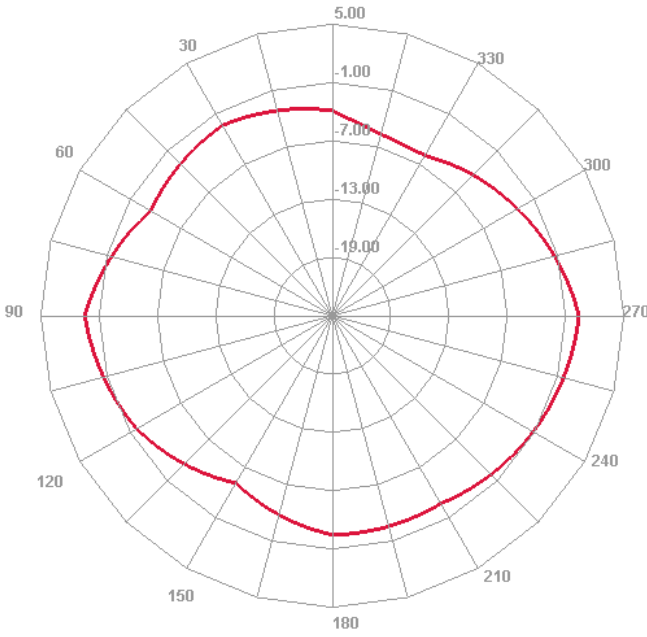


900 MHz E plane

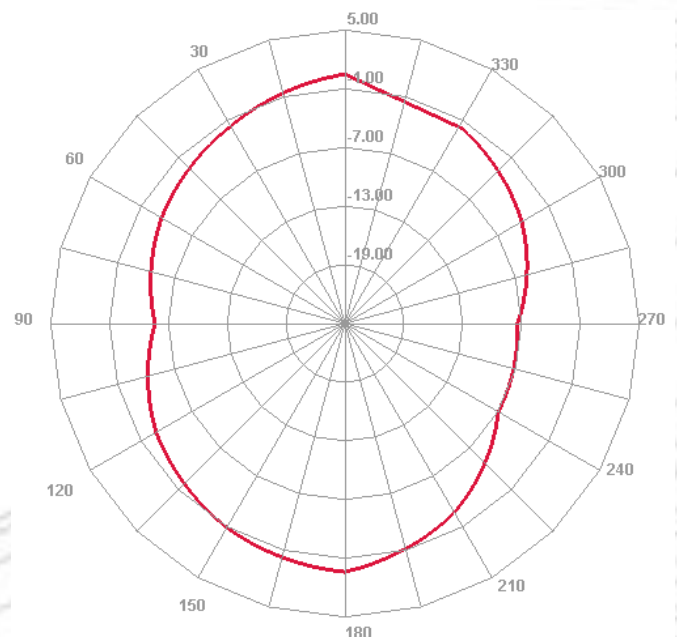

900MHz H plane

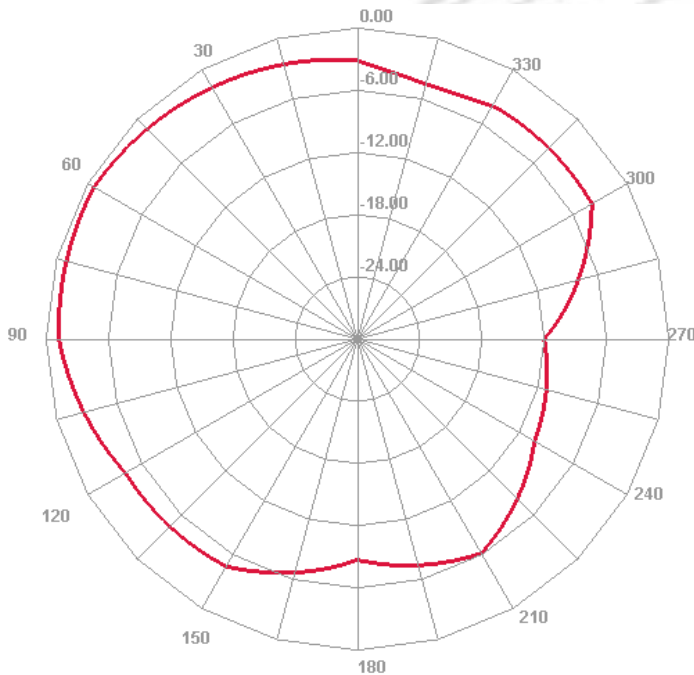

1800MHz E plane

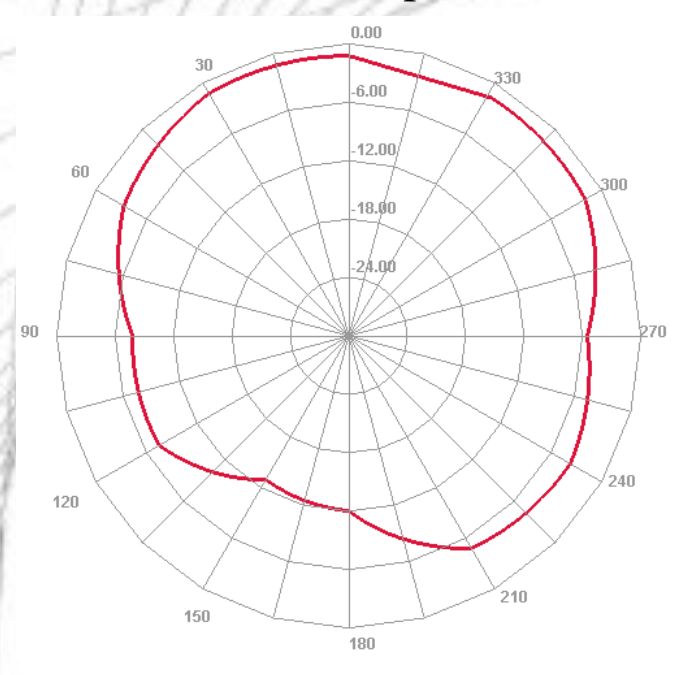


1800MHz H plane


Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


Radiation Pattern (5G)

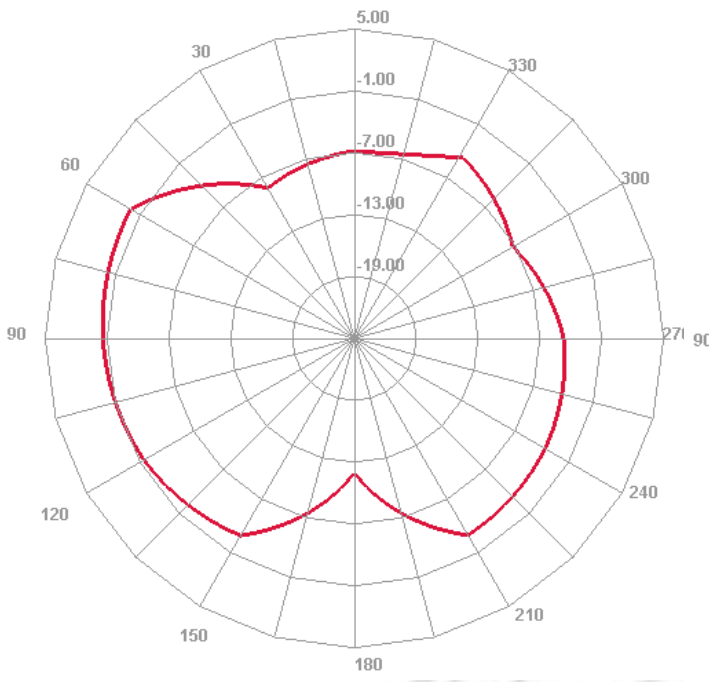


3500MHz E plane

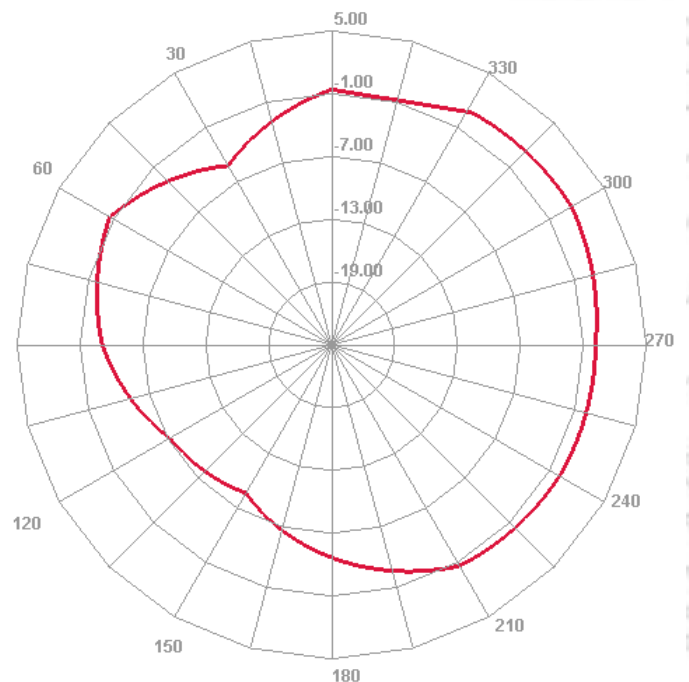

3500MHz H plane

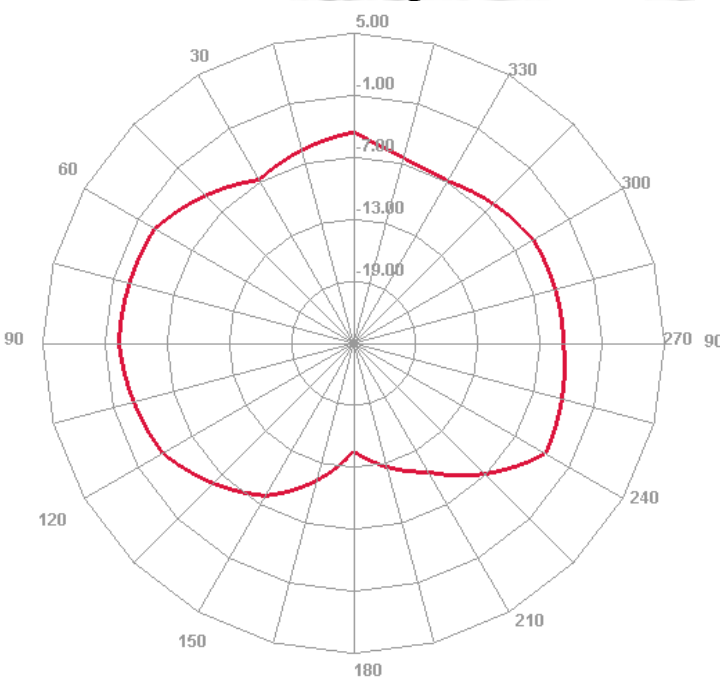

4800MHz E plane

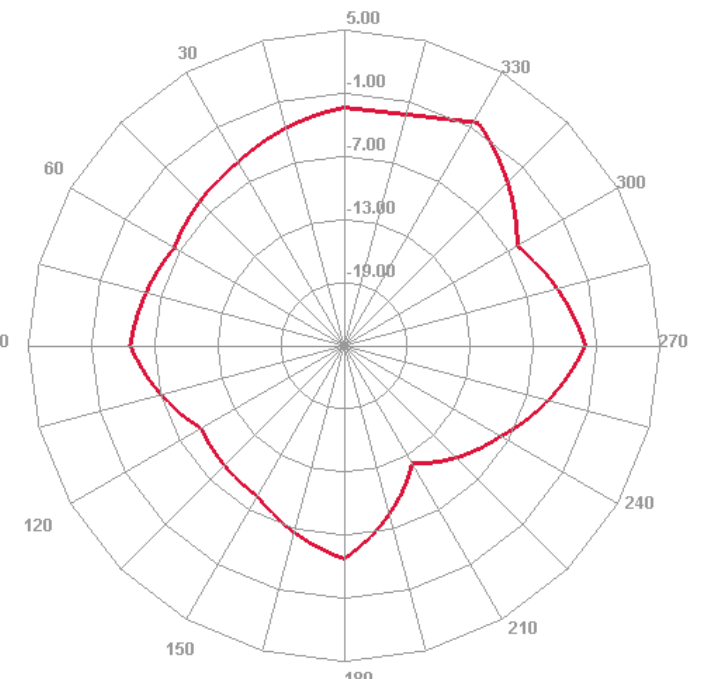


4800MHz H plane


Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN


Radiation Pattern (WiFi)

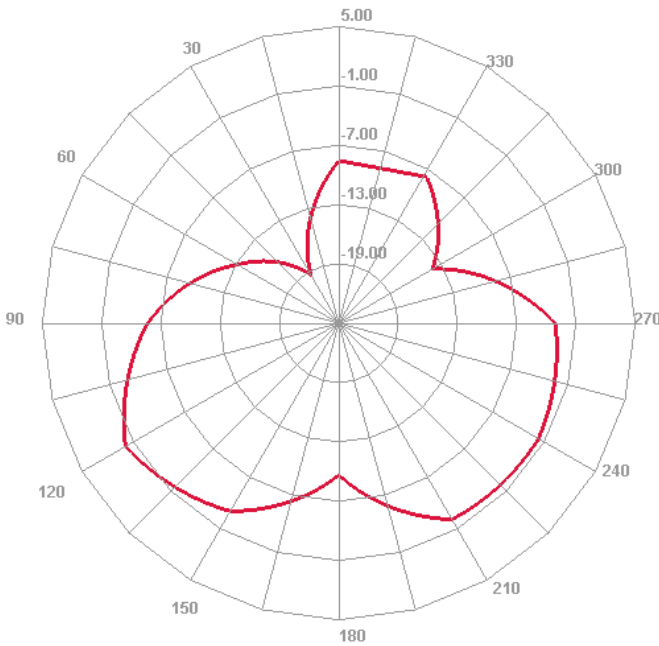


2400 MHz E plane

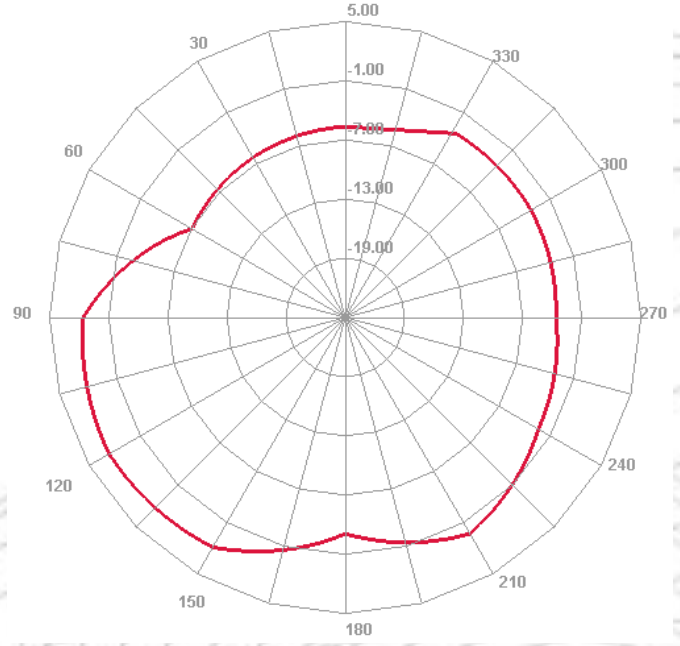

2400MHz H plane

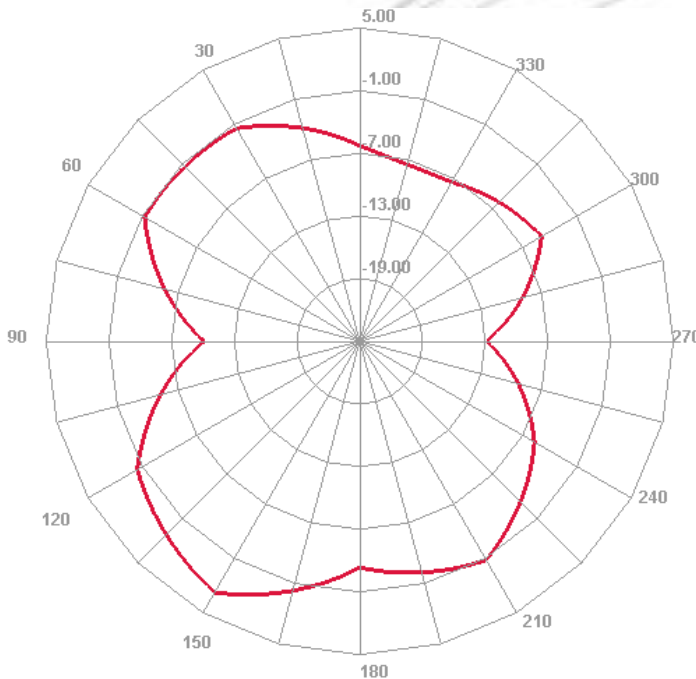

5800MHz E plane

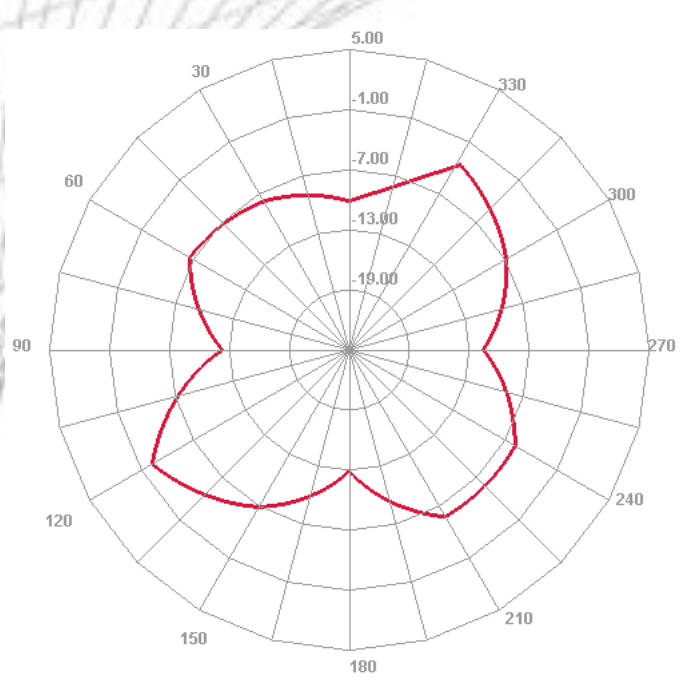


5800MHz H plane


Maswell 5G Combo Antenna 2X2 MIMO 5G , plus 2X2 MIMO WiFi 7 and GNSS Screw Mount

AN_Master_Cubic_2C2W1GN

Radiation Pattern (WiFi)

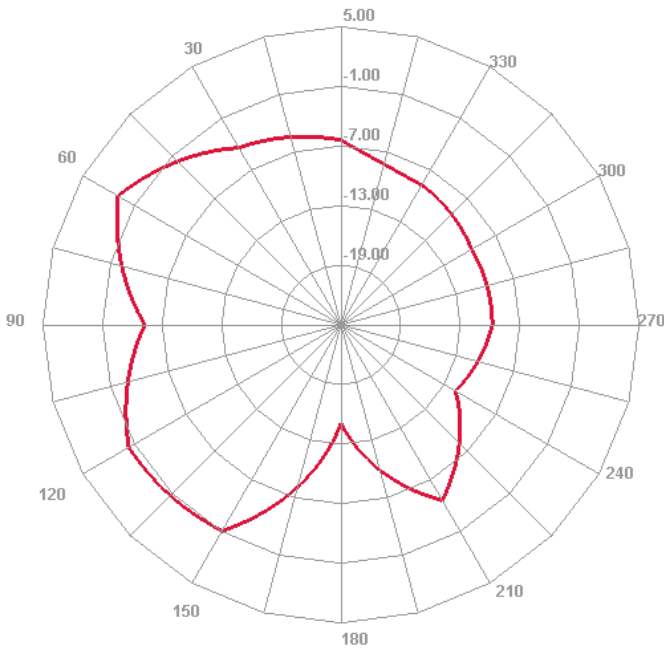

7100 MHz E plane

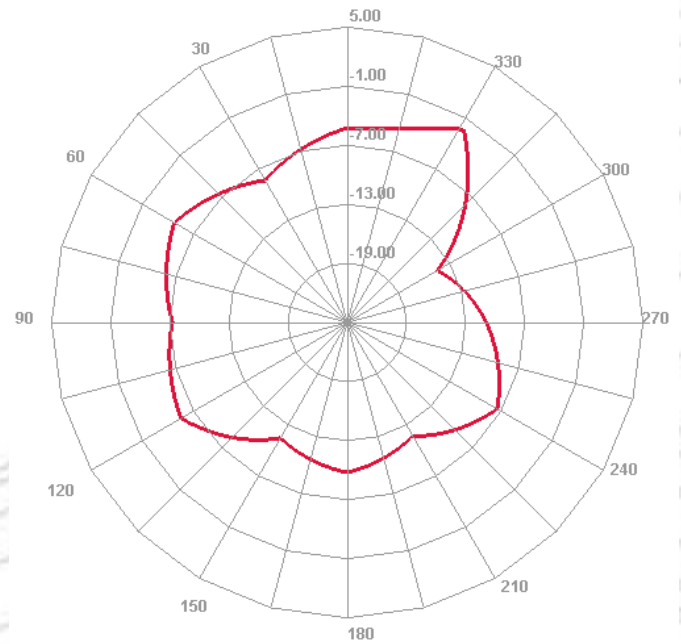

7100MHz H plane



TEST REPORT

EN 60529

Degrees of protection provided by enclosures(IP code)

Report reference No..... : CTB231113016Q

Date of issue..... : 2023-11-16

Testing laboratory

Name : Shenzhen CTB Testing Technology Co., Ltd.

Address..... : 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

Testing location..... : Same as above

Client

Applicant..... : Suzhou Maswell Communication Technology Co.Ltd

Address..... : Room 403,Building 1,No.88 Zhenbei Road,High-tech District,Suzhou 215153,Jiangsu,China

Test specification

Standard..... : EN 60529:1991+A1:2000+A2:2013+AC:2019

Procedure deviation..... : N/A

Non-standard test method.... : N/A

Object under test..... : Maswell MIMO Cubic Antenna Series

Model/Type reference..... : AN_Master_Cubic_4C/AN_Master_Cubic_2C2W/AN_Master_Cubic_4W and Variants

Others Model..... : /

Trade mark..... : Maswell

Manufacturer..... : Suzhou Maswell Communication Technology Co.Ltd

Address..... : Room 403,Building 1,No.88 Zhenbei Road,High-tech District,Suzhou 215153,Jiangsu,China

IP degrees..... : IP67

Possible test case verdicts

- test case does not apply to the test object..... : N/A(Not Applicable)

- test object does meet the requirement..... : P(Pass)

- test object does not meet the requirement..... : F(Fail)

Date of receipt of test item..... : 2023-11-10

Date(s) of performance of tests..... : 2023-11-13 to 2023-11-15

Laboratory sample number..... : 2231110007-1,14

Model PW-957(+)(f1)

File Number: E56070



COMPANY

CHI MEI CORPORATION

No 398 Sec 1 Zhongzheng Rd
Rende District
Tainan City, 717010 Taiwan

MODEL INFO

PW-957(+)(f1)

Acrylonitrile Styrene Acrylate (ASA) "KIBILAC", furnished as pellets

(f1) – Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

(+) – Indicate 0~0.5% acid scavengers.

FLAMMABILITY PROPERTIES	VALUE	TEST METHOD
Flammability		ANSI/UL 94
1.5 mm, Color: ALL	HB	
3.0 mm, Color: ALL	HB	
ISO/IEC FLAMMABILITY PROPERTIES	VALUE	TEST METHOD
Flammability		IEC 60695-11-10
1.5 mm, Color: ALL	HB75	
3.0 mm, Color: ALL	HB40	
ELECTRICAL PROPERTIES	VALUE	TEST METHOD
Hot-wire Ignition (HWI)		UL 746A
1.5 mm	PLC 4	
3.0 mm	PLC 3	
High Amp Arc Ignition (HAI)		UL 746A
1.5 mm	PLC 0	

3.0 mm	PLC 0	
Comparative Tracking Index (CTI)	PLC 0	UL 746A
High Voltage Arc Tracking Rate (HVTR)	PLC 3	
High Voltage, Low Current Arc Resistance	PLC 6	
THERMAL PROPERTIES	VALUE	TEST METHOD
Relative Thermal Index - Electrical Strength		UL 746B
1.5 mm	90 °C	
3.0 mm	90 °C	
Relative Thermal Index - Mechanical Impact		UL 746B
1.5 mm	90 °C	
3.0 mm	90 °C	
Relative Thermal Index - Mechanical Strength		UL 746B
1.5 mm	95 °C	
3.0 mm	95 °C	
PHYSICAL PROPERTIES	VALUE	TEST METHOD
UV Exposure & Water Immersion	f1	UL 746C

Report Date: 2006-08-31

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2024 UL LLC."